


WM240 Variable speed lathe

- Brushless motor
- Two speed bands allow maximum torque in the lower speeds
- Infinitely variable from 50 - 2000rpm
- Double vee bedway – hardened and ground
- Adjustable gibs to slideways
- Off set facility to tailstock
- Large cross slide with two full length tee slots
- Tailstock quill engraved metric and imperial
- Reversible motor
- Metric and imperial thread cutting
- Zero friction dials
- Thread dial indicator

Standard equipment includes:

- Face plate
- Three jaw self centre chuck with inside and outside jaws 125mm
- Four jaw independent chuck 125mm
- Fixed and travelling steadies

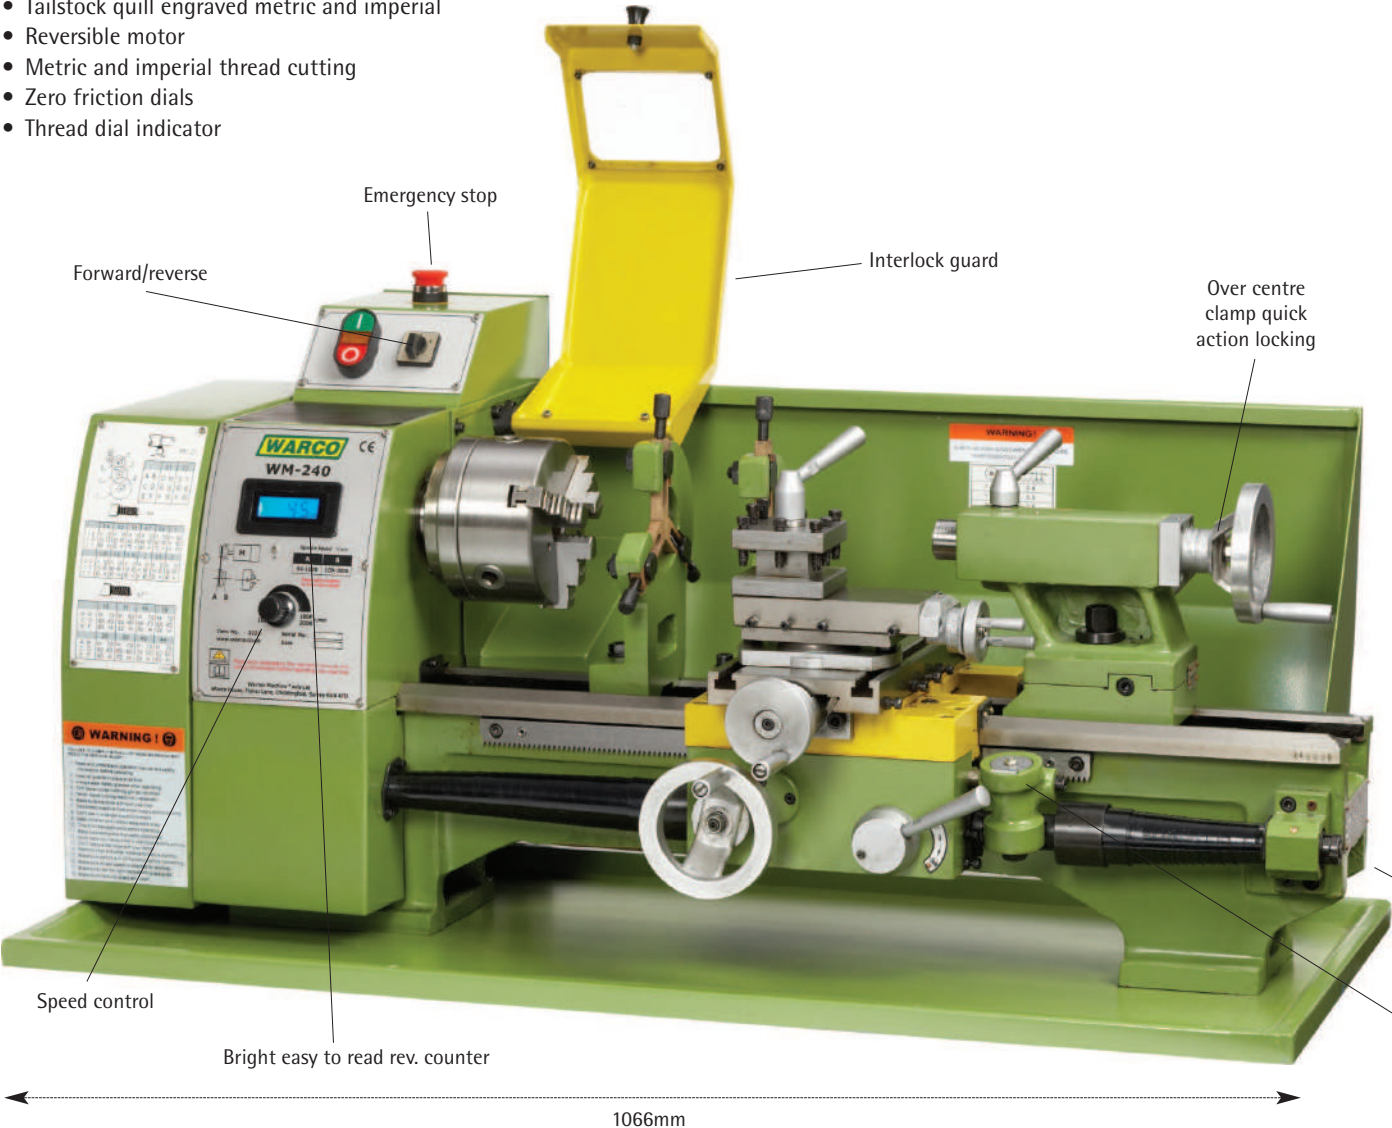

Item No. 3222BL	
SPECIFICATION	
Centre height	120mm
Maximum swing	240mm
Swing over cross slide	110mm
Distance between centres	400mm
Bed width	135mm
Longitudinal travel	350mm
Spindle taper	3MT
Spindle bore	21mm
Maximum tool size	12mm
Range of spindle speeds rpm	50-1000 100-2000
Range of metric threads (12)	0.4-3mm
Range of imperial threads (8)	10-44tpi
Tailstock taper	2MT
Tailstock quill travel	75mm
Top slide travel	75mm
Cross slide travel	85mm
Headstock bearings	Taper roller
Compound slide swivel	360°
Chuck mounting	Flange fitting
Motor	1.1kw
Power supply	240v
Dimensions L x W x H to end of handle grips	1066 x 585 x 470mm
Weight	110kg

Stand

Stand price includes delivery for despatch with lathe.
If stand is ordered separately an additional carriage charge will apply.



DIMENSIONS	
Length	975mm
Width	380mm
Height	760mm

Item No. 3224DL

We can supply DRO for the WM240 for customer installation
2 axis readout **Item No. 5102**
100mm scale **Item No. 5103**
400mm scale **Item No. 5109**

Components comprise:
• DRO screen • Mounting bracket
• 2 glass linear scales and brackets.
It will be necessary for customers to modify the brackets to fit individual machines.